


# PR1 Axle Mount with Optional Pump Drive

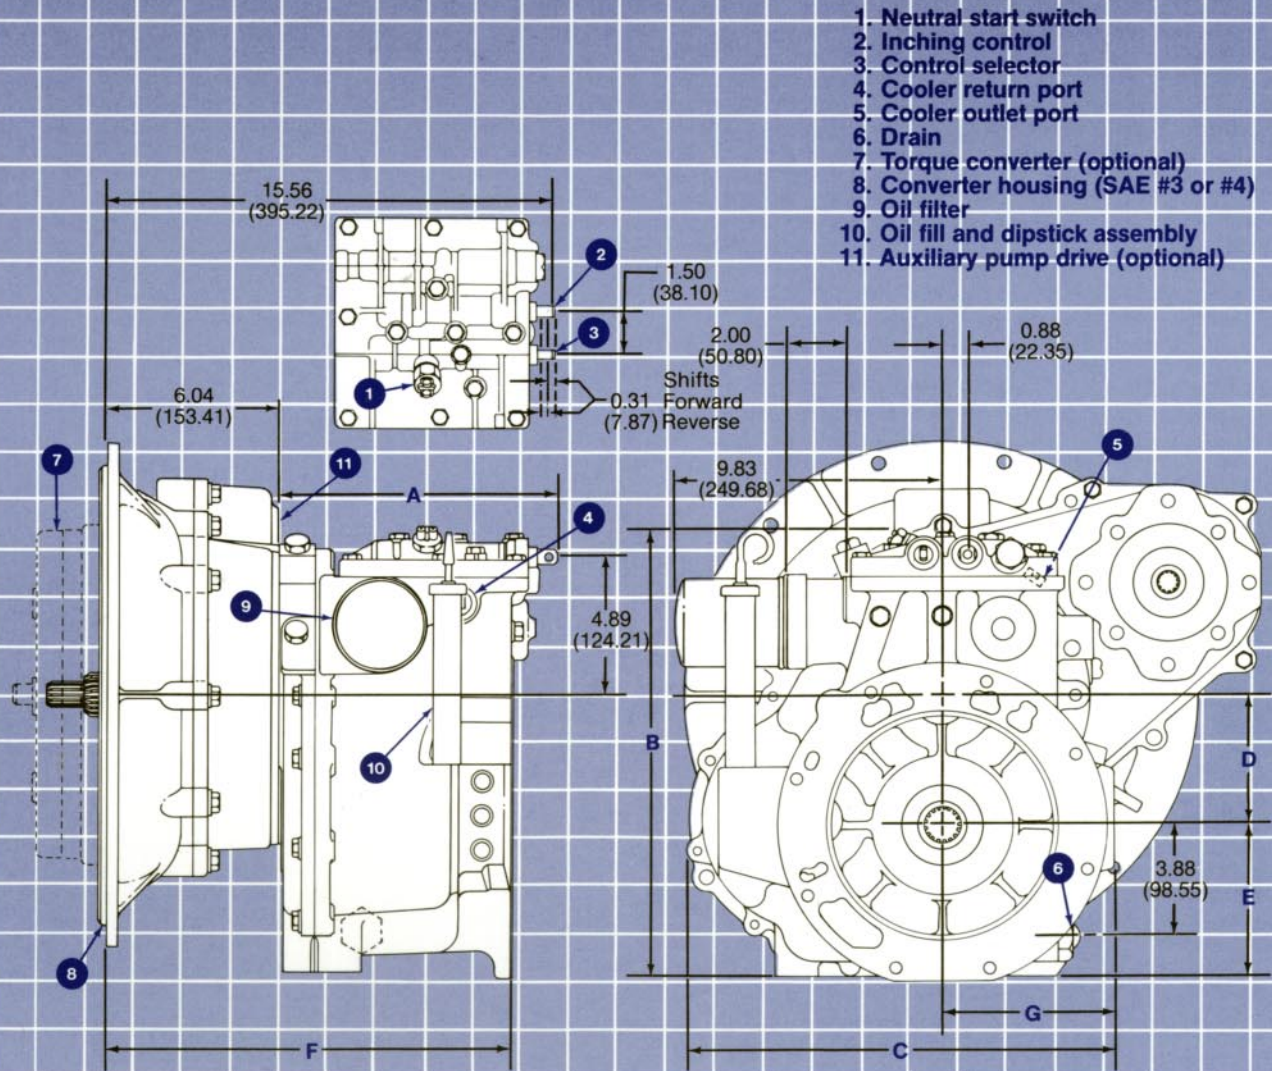

**PR1 Axle Mount Dimensions** inches (millimeters)

Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G
9.56 (242.82)	16.48 (418.59)	15.00 (381.00)	4.51 (114.55)	5.75 (146.05)	14.17 (359.92)	6.00 (152.40)

**PR1 Axle Mount Specifications** nominal (subject to change without notice)

Ratio*	1.09, 1.22:1
Weight (dry, less converter)	247 lbs. (112.3 kg)
Controls, selector	electrical-standard mechanical-optional
inching	mechanical
Spline, input	29 tooth, external involute
output	19 tooth, internal involute, flat root, side fit 16/32 D.P., 30° P.A., 1.1875 P.D.
Oil filter	standard
Auxiliary pump drive (see page 12 for installation information)	SAE B, 2 or 4 bolt, 60 hp. (44.7 kW) max.-optional

\*For other ratio possibilities contact Velvet Drive Transmissions.