


1. Neutral start switch
2. Inching control
3. Control selector
4. Cooler return port
5. Cooler outlet port
6. Drain
7. Torque converter (optional)
8. Converter housing (SAE #3 or #4)
9. Oil filter
10. Oil fill and dipstick assembly

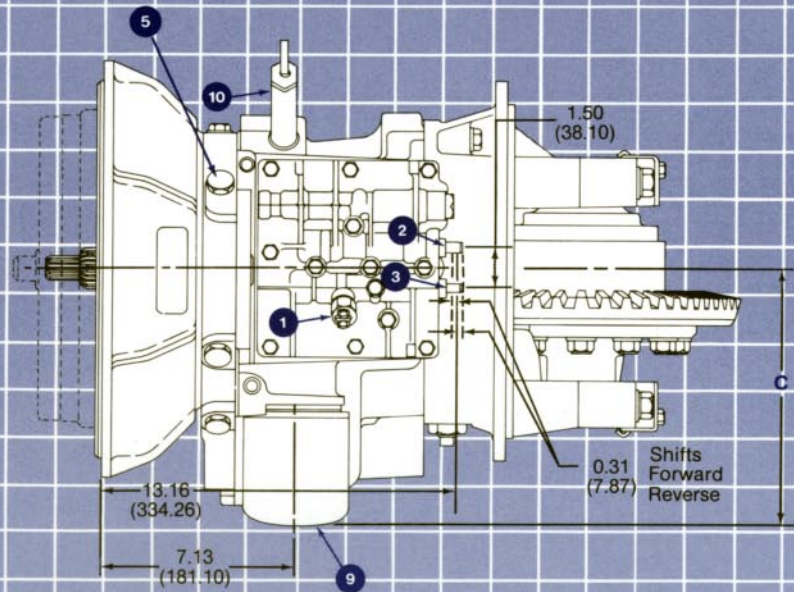

PR1 Transaxle Specifications nominal (subject to change without notice)

Ratio*	transmission 2.55:1, axle 7.00:1
Weight (dry, less converter)	287 lbs. (130.5 kg)
Controls , selector	mechanical
inching	electrical-optional
Spline , input	29 tooth, external involute
output	25 tooth, internal involute, flat root, side fit 16/32 D.P., 30° P.A., 1.5625 P.D.
Oil filter	standard
Auxiliary pump drive (see page 12 for installation information)	SAE B, 2 or 4 bolt, 60 hp. (44.7 kW) max.-optional
Ring gear (maximum outside diameter)	12 inch (305 mm) standard
Differential pinion gears	four
Differential torque (maximum)	6000 lb. ft. (8135 Nm)

*For other ratio possibilities contact Velvet Drive Transmissions.